Pro-Tech TOOLS

2in1 mobile lounger assembly



Instructions for use

Translation of the original instructions



Please read these instructions thoroughly before first use. It is the user's responsibility to familiarise themselves with all the instructions necessary for safe use and operation and to understand all the risks that may arise during the operation of the equipment.

WARNING!!!

Due to the continuous improvement of products, the photographs and images included in the instructions are for illustrative purposes only and may differ from the purchased goods.

These differences cannot be grounds for a complaint.

SAFETY

Before using the equipment or attempting to assemble it, the contents of this manual should be carefully read. Improper installation or use may cause serious damage to health or property.

The lounger should be used only and exclusively in the manner for which it is intended. Do not stand on the lounger and
only use it on a hard, level surface that is capable of supporting its weight and the weight of the person using it. Use of the equipment on any other surface may result in loss of stability and an accident.


Do not make any adjustments to the equipment. They lead to an immediate loss of warranty due to the high risk of loss of safety in that they entail. If the recumbent is , damaged, improperly assembled, you should stop working with the equipment immediately.

The materials used in the manufacture of the workshop lounger are flammable. Take extra care if there is a risk of sparks in the environment in which the equipment is used.

ASSEMBLY

Start by joining the three parts of the chaise longue structure using the 4 M8x559 bolts and M8 nuts supplied in packaging as shown in the following figure. Then prepare the 6 swivel castors and screw them into the locations shown in the illustration using the screws provided in the package. The method of mounting them is as follows
shown in the figure. Make that all screws are tightened properly.

1. Soft backrest
2. Screws (4)
3. Washers (4)
4. Wheels (2)
5. Lower part of the structure
6. Locking pin
7. Middle part of the structure
8. Upper part of the structure
9. Castors (2)
10. Washers (2)

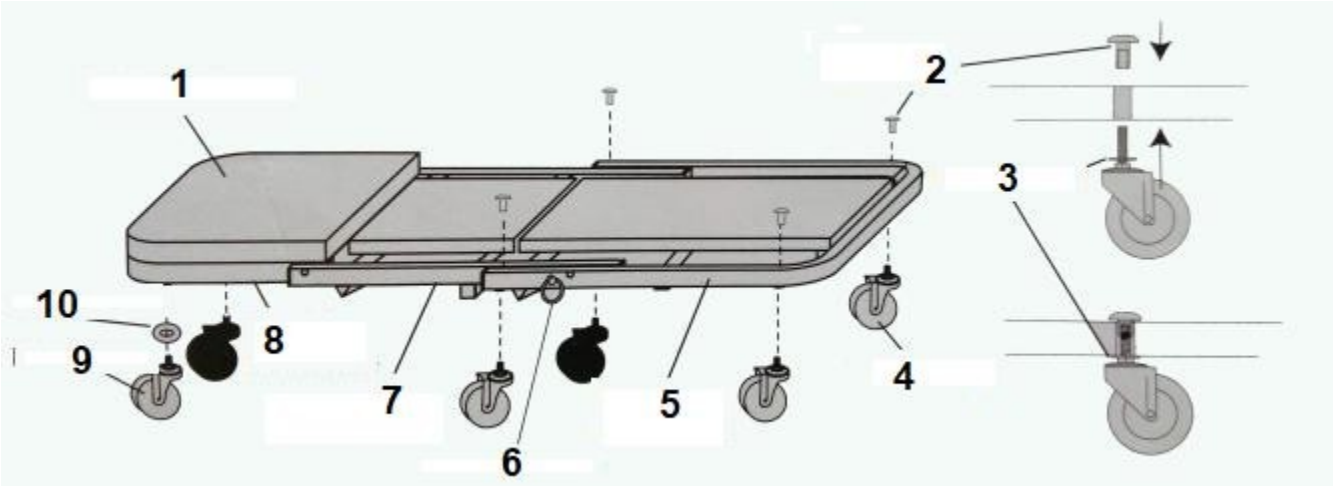

CONVERSION INTO A WORKSHOP SEAT

To convert a workshop recliner into a movable seat, the instructions below must be carried out chronologically:

1. Release the recumbent position by pulling the locking pin towards you. Its position is shown in the illustration.

2. Rotate the middle part of the structure to the point where the locking pin does not lock into , securing the position of the device.


3. Turn the upper part of the structure to a horizontal position.

To return to the function of the workshop recliner, it is necessary :

1. Rotate the top of the structure to a horizontal position.

2. Release the recumbent position by pulling out the locking pin.

3. Rotate the middle part of the structure to the where the locking pin does not lock into , securing the position of the workshop seat.

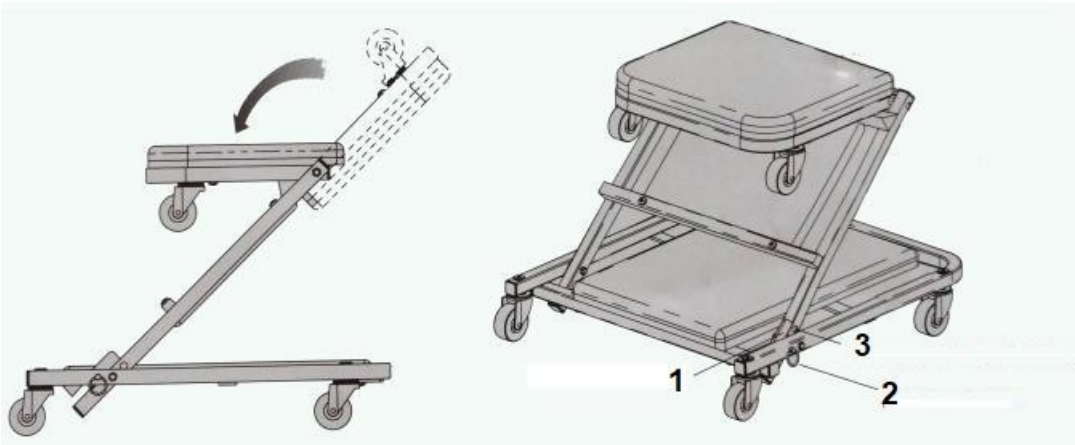

1. Lock latch
2. Locking pin
3. Hole of the locking pin