
Pro-Tech TOOLS

2T ramp

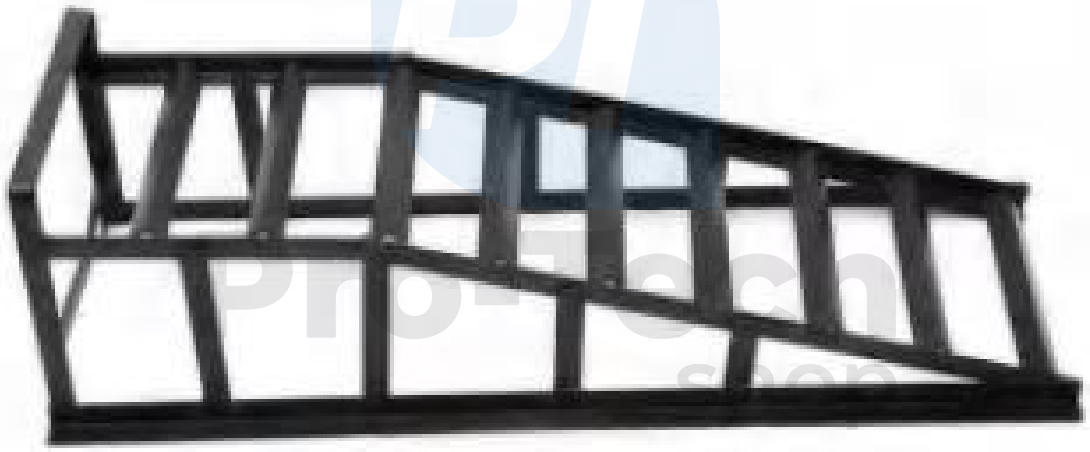

Instructions for use

1. Purpose of the device

The Pro-Tech TOOLS ramp is designed to safely and stably lift vehicles weighing up to 2 tonnes, allowing convenient access to the chassis for maintenance or repairs.

Technical parameters:

- **Maximum load capacity:** 2 000 kg (2 t)
- **Material:** Durable steel with non-slip surface
- **Dimensions:** height 240mm

Instructions for use:

1. **Preparation:**
   - Make sure the vehicle is on a level and firm surface.
   - Check that the ramps are undamaged and clean.
2. **Placement of ramps:**
   - Place the ramps in front of the wheels of the axle you plan to lift and align them with the wheels.
3. **:**
   - Slowly and carefully drive the vehicle onto the ramps until the wheels are completely on top of the ramp.
   - Pull the handbrake and switch off the engine.
4. **Vehicle security:**
   - Place chocks behind the wheels left on the ground to prevent the vehicle from moving.
5. **Work under the vehicle:**
   - Before getting under the vehicle, make sure it is stable on the ramps and not in danger of moving.
6. **Descending the ramps:**
   - When the work is complete, remove the chocks, start the engine and slowly back off the ramps.

Safety :

- Do not exceed the maximum load capacity of the ramp.
- Use the ramp on a firm and level surface.
- Always secure the vehicle against movement with chocks.
- Never work under a vehicle that is not properly secured.
- Check the condition of the ramp regularly and do not use it if it is damaged.

By following these instructions, you will ensure safe and efficient use of the ramp when maintaining and repairing your vehicle.

Pro-Tech shop